


SL876Q5-A

GNSS Embedded

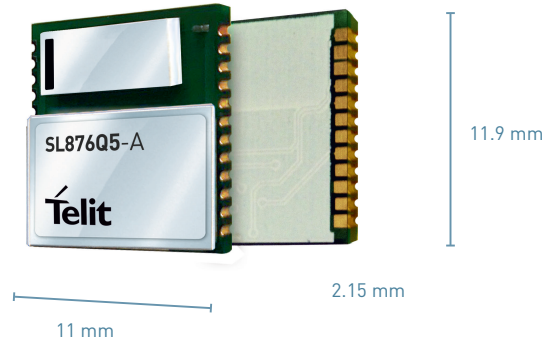

Product Description

The SL876Q5-A is an ultra-slim, GNSS smart antenna location module with an isotropic linear antenna suited for applications requiring omnidirectional reception capability.

Packaged in an 11 x 11.9 x 2.3 mm LCC form factor, this turnkey module includes a comprehensive feature set that eliminates the need for additional components, ideal for IoT projects with size, cost, and time constraints. In addition to an embedded linear antenna, the module is equipped with flash memory, additional LNA, SAW Filter and TCXO.

Easing the development process for designers with little or no RF experience, the SL876Q5-A is compliant with regulatory and industry standards specifications.

Additionally, it supports the usage of an external antenna through an embedded RF switch. This feature is particularly useful in applications such as personal trackers and alarms in which the the main antenna is the external one and the internal antenna is used as backup when the external is broken or compromised.

Expect exceptional GNSS coverage with a quad-constellation navigation core and A-GNSS that is designed with onboard extended ephemeris (EE) generation and server-generated file injection that can be stored into the embedded flash memory.

The SL876Q5-A delivers superior performance and ultra-low power consumption. For applications where extended battery life is mandatory, such as wearables, the SL876Q5-A features ultra-low power consumption equipped with intelligent power modes.

Key Features and Benefits

Full GNSS for exceptional coverage

- Quad-GNSS: GPS/ QZSS and GLONASS or BeiDou; Galileo ready
- A-GNSS: Onboard generation and server generated file injection that can be stored into the embedded flash memory

Superior performance

- Omnidirectional antenna design delivers industry-leading performance in sensitivity, tracking performance, and accuracy
- MEMS wakeup feature offers lowest power consumption
- Built in LNA for improved sensitivity

Simplify integration

- Primary UART port. A secondary port can be configured as UART, I2C, or SPI at boot/reset (If I2C, the secondary port supports either commands and messages or MEMS wakeup.)
- Embedded RF switch allows easy integration with external antennas

Industry-leading features

- Ultra-slim design
- 11 x 11.9 x 2.3 mm LCC package for space constrained devices
- Flash memory enables firmware upgrades, customization, and AGPS file storage, which is ideal for battery-dependent devices

AVAILABLE FOR

- EMEA
- North America
- Latin America
- APAC
- Africa
- Russia

Combine your Cellular module with

Short Range modules



GNSS modules



www.telit.com

Complete, Ready to Use Access to the Internet of Things



IoT MODULES



IoT CONNECTIVITY



IoT PLATFORMS



IoT KNOW-HOW

SE876Q5-A

Product Features

- Frequency Bands: GPS L1, GLONASS L1, Galileo E1, BeiDou B1
- Standards: NMEA and OSP binary
- SBAS (EGNOS, WAAS, GAGAN and MSAS) capability
- RTC for efficient power management
- Jammer rejection
- Embedded RF switch for external antenna support
- Local and server-based A-GPS
- External antenna support
- Additional LNA
- Embedded SAW filter

Environmental

- Dimensions: 11 x 11.9 x 2.3mm
- 24-pad LCC package
- Weight: 0.8g
- Temperature range:
 - Operating temperature: -40°C to +85°C
 - Storage temp: -40°C to +85°C
- Power supply
 - Range from 1.75 up to 1.85V

Interfaces

- 1st Serial Port: UART, I2C, or SPI
- 2nd Serial Port: I2C or UART
- 1PPS Time Mark pulse
- RF input for external antenna

Approvals

- RoHS compliant
- CE / R&TTE

Performance

- Power consumption
 - Hibernate: 62 uW
 - Acquisition (G+G): 104 mW
 - Tracking (G+G): 87 mW
- Sensitivity
 - Acquisition: -148 dBm
 - Tracking: -167 dBm
- Positional accuracy (CEP): Autonomous Positional Error <1.5 m
- Accuracy:
 - Speed: 0.01 m/s
 - Heading: 0.01 deg
- Time to First Fix (90% @ -130 dBm)
 - Hot Start: 1s
 - Cold Start: <27s



Join the Telit Technical Forum

For a quicker and more rewarding integration experience join the Telit Technical Forum. There you can browse the first open forum covering all IoT topics, get direct support by region (EMEA, North America, Latin America, APAC), take part in this quickly growing IoT community and exchange experiences.